

L-C-A6457-1224

**TEN** PLUS

LOUVERS - CONVENTIONAL

ARCHITECTURAL PRODUCTS LTD.

# LOUVER SELECTING GUIDELINES



Selecting the right louver for your application is critical to achieving optimal performance, whether your priority is resistance to water penetration or minimizing static pressure drop. Our Storm Resistant Louvers offer unparalleled protection and efficiency, making them the superior choice for most applications.

## FREE AREA

The free area of a louver is the unobstructed space through which air can pass freely. This parameter, along with the total air volume, determines the air velocity through the louver. Free area velocity directly influences critical factors such as static pressure drop and water penetration, which are key to louver performance.

## SIZING LOUVERS

Follow these steps to select the ideal louver for your needs:

1. Prioritize resistance to water penetration. For applications where water ingress is a concern, we strongly recommend selecting a model from our Storm Resistant Louver line. These louvers are engineered and “wind-driven rain” tested to deliver superior performance in even the most demanding conditions.
2. Consider static pressure drop. If minimizing static pressure drop is the primary goal, explore our Conventional Louver line for models that balance airflow with performance.
3. Identify the best louver model for your application. Choose a louver that aligns with your specific aesthetical and operational needs.
4. Determine the airflow volume. Calculate the total volume of air in cubic feet per minute (CFM), or cubic meters per second or (m<sup>3</sup>/s) that will pass through the louver.
5. Define your design priorities. Establish the most important design criteria by selecting from the following:
  - Resistance to Water Penetration: If avoiding water penetration is paramount, select a louver model with a velocity below the threshold shown on the water penetration chart.
  - Static Pressure Drop: If minimizing pressure drop is critical, choose a velocity consistent with the pressure drop chart.
  - Balanced Priorities: If both water resistance and static pressure drop are equally important, opt for the lower of the two velocities.
6. Calculate the required free area. Divide the total air volume (CFM or m<sup>3</sup>/s) by the selected free area velocity (FPM or m/s) to determine the total free area needed.
7. Select the louver dimensions. Match the required free area to the dimensions on the louver’s free area chart to Finalize the overall size of the louver.

## LOUVER CATEGORIES

| CONVENTIONAL LOUVERS                                                                | ACOUSTICAL LOUVERS                                                                  | STORM RESISTANT LOUVERS                                                             | PENTHOUSE LOUVERS                                                                     | LOUVERED SCREENS                                                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |

Feel free to contact us for assistance on proper louver sizing.

PHONE: 905-363-2306 | TOLL FREE: 1(888) 850-3878 | EMAIL: [info@tenplus-online.com](mailto:info@tenplus-online.com)

# ACOUSTICAL BLADE LOUVER

## Model A6457

### GENERAL DESCRIPTION

Ten Plus Model A6457 – 152 mm [6"] deep, acoustical blade louver. Head blades and sill cavities are filled with acoustical insulation. All framing members consist of formed aluminum profiles. Perimeter framing is designed to accommodate rope and caulk sealant applications. Assembly includes vertical mullions at 1500 [60"] centers.

### PERFORMANCE RATING STANDARD: AMCA STANDARD 500L

|                                                                                                   |                                         |
|---------------------------------------------------------------------------------------------------|-----------------------------------------|
| Louver type                                                                                       | Mullion                                 |
| Louver depth                                                                                      | 152 mm (6")                             |
| Blade angle                                                                                       | 45°                                     |
| Free area 1220 x 1220 (48"x48") Unit                                                              | 4.31sq. ft. (0.401 m <sup>2</sup> ) 27% |
| Free area velocity at beginning point of water penetration (0.01 oz / ft <sup>2</sup> )           | 766 FPM (3.89 m/s)                      |
| Air volume at beginning of water penetration 1220 x 1220 (48"x48") Unit – 15 minute test duration | 3302 CFM (1.56 m <sup>3</sup> /s)       |
| Pressure drop at beginning point of water penetration                                             | 0.063 in. H <sub>2</sub> O (15.7 Pa)    |
| Notes                                                                                             | Tested without bird screens             |

### ABBREVIATED SPECIFICATION

Where indicated on the drawings, supply and install Model A6457, 6" (152 mm) deep, acoustical louver. Submit all details to consultant for approval prior to fabrication. Blades, head, sill, jambs and mullions shall have a nominal thickness of 0.080" (1.57 mm) formed aluminum sheet. All blades, head and sill cavities shall be packed with acoustical insulation.

Louvers shall be supplied with a 5/8" (16 mm), flat expanded aluminum mesh in a mill finish, aluminum frame. Fasteners shall be standard zinc-plated steel or stainless steel.

### Materials Manufacturer:

Ten Plus Architectural Products Ltd.,  
5 - 2333 Millrace Court, Mississauga,  
Ontario, Canada,  
L5N 1W2;

Phone: 905-363-2306, Toll free: 1(888) 850-3878;  
Email: [info@tenplus-online.com](mailto:info@tenplus-online.com);  
URL: [www.tenplus-online.com](http://www.tenplus-online.com)

Structural supports shall be designed and furnished by the Louver manufacturer to support a wind load of 20 psf (958 Pa) unless specified otherwise. Any Louver opening greater than 10' (3 m) high will require a horizontal girt at mid-span by others.

Louvers shall be fabricated with mill finish aluminum, and the finish shall be applied after assembly. Select the desired finish from the following:

For superior performance, a 3 coat PVDF system includes a thermal setting application of 70% fluoropolymer resin. OR High-performance 2 coat, PVDF system including a thermal setting application of 70% fluoropolymer resin.

OR Powder coat finish system to meet AAMA 2605 requirements.


OR (Color Anodize) Ensure the aluminum finish is color anodized in accordance with Aluminum Association Finish Designation AA-M12C22A44, Class I, minimum 0.018 mm (0.7 mils) thick finish. Color to be selected by the consultant.

OR (Clear Anodize) Ensure the aluminum finish is clear anodized in accordance with Aluminum Association Finish Designation.

AA-M12C22A41, Class I, minimum 0.018 mm (0.7 mils) thick for exterior applications and AA-12C22A31, Class II, minimum 0.01 mm (0.4 mils) thick for interior applications.

| LOUVER WIDTH  |                                                     |      |       |       |       |       |
|---------------|-----------------------------------------------------|------|-------|-------|-------|-------|
| LOUVER HEIGHT | INCHES                                              | 12   | 24    | 36    | 48    | 60    |
|               | MM                                                  | 305  | 610   | 914   | 1219  | 1524  |
|               | MODEL A6457 FREE AREA - SQUARE FEET / SQUARE METERS |      |       |       |       |       |
|               | 12                                                  | 0.13 | 0.29  | 0.45  | 0.62  | 0.78  |
|               | 305                                                 | 0.01 | 0.03  | 0.04  | 0.06  | 0.07  |
|               | 24                                                  | 0.40 | 0.88  | 1.36  | 1.85  | 2.33  |
|               | 610                                                 | 0.04 | 0.08  | 0.13  | 0.17  | 0.22  |
|               | 36                                                  | 0.67 | 1.47  | 2.27  | 3.08  | 3.88  |
|               | 914                                                 | 0.06 | 0.14  | 0.21  | 0.29  | 0.36  |
|               | 48                                                  | 0.94 | 2.06  | 3.18  | 4.31  | 5.43  |
|               | 1219                                                | 0.09 | 0.19  | 0.30  | 0.40  | 0.50  |
|               | 60                                                  | 1.20 | 2.65  | 4.09  | 5.54  | 6.99  |
|               | 1524                                                | 0.11 | 0.25  | 0.38  | 0.51  | 0.65  |
|               | 72                                                  | 1.47 | 3.24  | 5.00  | 6.77  | 8.54  |
|               | 1829                                                | 0.14 | 0.30  | 0.47  | 0.63  | 0.79  |
|               | 84                                                  | 1.74 | 3.83  | 5.91  | 8.00  | 10.09 |
|               | 2134                                                | 0.16 | 0.36  | 0.55  | 0.74  | 0.94  |
|               | 96                                                  | 2.01 | 4.42  | 6.82  | 9.23  | 11.64 |
|               | 2438                                                | 0.19 | 0.41  | 0.63  | 0.86  | 1.08  |
|               | 108                                                 | 2.27 | 5.00  | 7.73  | 10.46 | 13.19 |
|               | 2743                                                | 0.21 | 0.47  | 0.72  | 0.97  | 1.23  |
|               | 120                                                 | 2.54 | 5.59  | 8.64  | 11.70 | 14.75 |
|               | 3048                                                | 0.24 | 0.52  | 0.80  | 1.09  | 1.37  |
|               | 132                                                 | 2.81 | 6.18  | 9.55  | 12.93 | 16.30 |
| 3353          | 0.26                                                | 0.57 | 0.89  | 1.20  | 1.51  |       |
| 144           | 3.08                                                | 6.77 | 10.46 | 14.16 | 17.85 |       |
| 3658          | 0.29                                                | 0.63 | 0.97  | 1.32  | 1.66  |       |

Model A6457

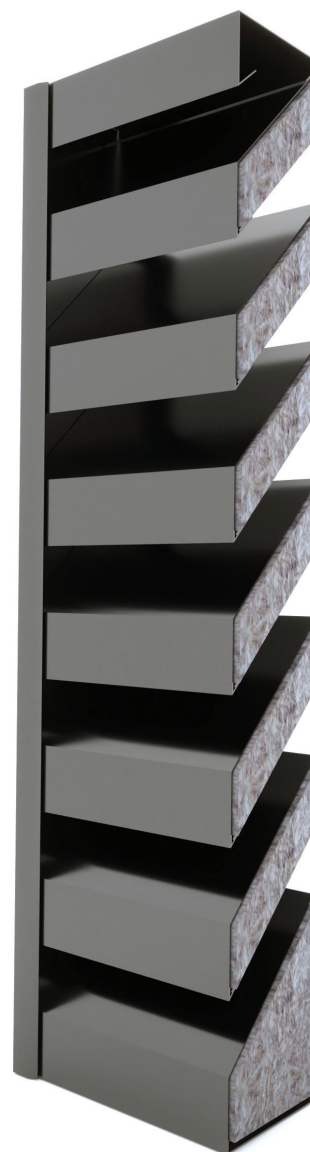

© Copyright 2024 Ten Plus Architectural Products Ltd. Ten Plus Architectural Products Ltd. reserves the right to make design changes or to withdraw products without notice.

## MODEL A6457 TRANSMISSION LOSS (dB)

*Tested in accordance with ASTM E90*

| OCTAVE BAND            | 1   | 2   | 3   | 4   | 5    | 6    | 7    | 8    |
|------------------------|-----|-----|-----|-----|------|------|------|------|
| FREQUENCY              | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| TRANSMISSION LOSS (Db) | N/A | 10  | 10  | 13  | 18   | 20   | 18   | N/A  |

## MODEL A6457 FIELD NOSIE REDUCTION (dB)

*Tested in accordance with ASTM E90*

| OCTAVE BAND            | 1   | 2   | 3   | 4   | 5    | 6    | 7    | 8    |
|------------------------|-----|-----|-----|-----|------|------|------|------|
| FREQUENCY              | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| TRANSMISSION LOSS (Db) | N/A | 10  | 10  | 13  | 18   | 20   | 18   | N/A  |

## ACCESSORIES

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bird and insect screens   | <ul style="list-style-type: none"> <li>• Standard: 16 mm (5/8") flat, expanded aluminum mesh</li> <li>• 12 x 12 mm (1/2") inter-crimped 1.6 mm (14 ga) al. wire (optional)</li> <li>• 16 x 18 aluminum mesh insect screen (optional)</li> <li>• Stainless steel screens available</li> </ul>                                                                                                                                            |
| Blank-off panels          | <ul style="list-style-type: none"> <li>• Non-insulated sheet blank-off panels in aluminum or galvanized steel</li> <li>• Insulated panels to desired thickness and R-value</li> </ul>                                                                                                                                                                                                                                                   |
| Sill Flashings            | Formed aluminum sheet                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Structural support design | Min. 960 Pa (20 psf) wind load or as otherwise specified                                                                                                                                                                                                                                                                                                                                                                                |
| Finish                    | <ul style="list-style-type: none"> <li>• Mill finish</li> <li>• Three coat 70% PVDF thermal setting resin to AAMA 2605 standard</li> <li>• Two coat 70% PVDF thermal setting resin to AAMA 2605 standard</li> <li>• Four coat 70% PVDF thermal setting resin to AAMA 2605 standard</li> <li>• Color anodic AA-M12C22A44, Class I</li> <li>• Clear anodic AA-M10C22A41, Class I</li> <li>• Clear anodic AA-10C22A31, Class II</li> </ul> |
| Options                   | <ul style="list-style-type: none"> <li>• Flange frame</li> <li>• Glazing flange</li> <li>• Mitered corners</li> <li>• Hinged doors and access panels</li> <li>• Pipe / service penetrations</li> </ul>                                                                                                                                                                                                                                  |
| Assembly Fasteners        | • Stainless steel                                                                                                                                                                                                                                                                                                                                                                                                                       |



## FINISHES



### THREE COAT SYSTEM

Superior performance three coat system (primer/color coat/clear coat) including thermal setting application of 70% fluoropolymer resin minimum, PVDF with added color pigment finish exceeding or meeting AAMA 2605 requirements. Ensure fluoropolymer-baked resins form a continuous physically locked finish during the manufacturing process. Apply fluoropolymer finish after multistage chemical treatment cleaning, providing a corrosion resistant surface ready to receive primer. Acceptable Product: Duranar XL by PPG Industries or equivalent by Valspar.



### TWO COAT SYSTEM

A high-performance two coat system with a 70% fluoropolymer resin finish, meeting or exceeding AAMA 2605 requirements. Apply after multistage chemical cleaning for corrosion resistance. Acceptable Product: By PPG Industries or equivalent by Valspar.



### POWDER COAT FINISH

The powder coat system must meet AAMA 2605 requirements, with a minimum adhesion rating of 9 (ASTM D-3359), corrosion resistance of at least 5 (ASTM B-117), and gloss level of 20 (Gloss Meter). It must withstand weather, UV radiation, and chemical exposure while maintaining a smooth, even finish. Acceptable Product: by PPG Industries or equivalent by Valspar.



### COLOR ANODIZED FINISH

Ensure the aluminum finish is color anodized in accordance with Aluminum Association Finish Designation AA-M1 2C22A44, Class I, minimum 0.018 mm (0.7 mils) thick finish. Color to be selected by the consultant.



### CLEAR ANODIZED FINISH

Ensure aluminum finish is clear anodized in accordance with Aluminum Association Finish Designation AA-M1 2C22A41, Class I, minimum 0.018 mm (0.7 mils) thick for exterior applications and AA-12C22A31, Class II, minimum 0.01 mm (0.4 mils) thick for interior applications.



## TEN PLUS

TEN Plus owes its success to the simple business philosophy of providing quality products, great service, and an unwavering commitment to customer satisfaction.


We accomplish our goals by investing in people and technology. We strive to improve productivity and optimize the use of our resources through investment in state-of-the-art equipment, training and the use of innovative design principles. Rigorous quality control and workplace safety practices ensure the well-being of our employees and business partners.

Our technical representatives possess comprehensive louver knowledge and extensive field experience. Each one is capable of assisting you through the design and engineering stage, as well as overcoming the unforeseen field conditions.

We trust that this catalogue will prove to be a useful aid and resource to selecting your louvers. However, should you have any questions or unique conditions requiring greater detail, please feel free to call us for assistance. Our staff is attentive to your needs and eager to serve you. We look forward to your call.

**T:** (905) 363-2306  
**F:** (905) 363-2309

**TF:** 1 (888) 850-3878  
**E:** [info@tenplus-online.com](mailto:info@tenplus-online.com)

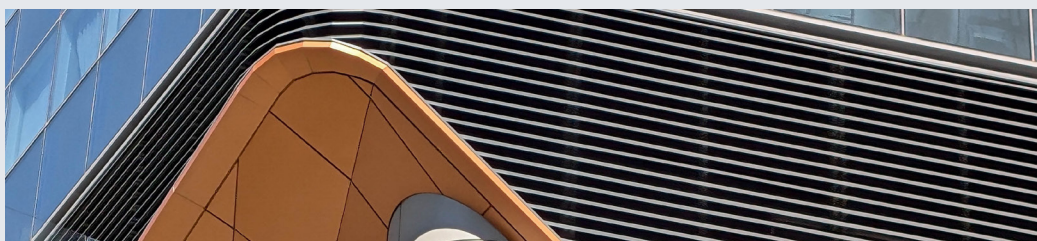

**NOTE:** Although great care has been taken in the production of this catalogue, illustrative or copy errors may occur. TEN PlusArchitectural Products Ltd. assumes no liability for any errors contained herein. This publication supersedes all prior technical, policy, and print data. Specifications are subject to change without notice.