


## INTERIOR FLOORS

ARCHITECTURAL SYSTEMS

### NO BUMP SERIES



**NBR** ● ● ●

**Tile Recessed**

1-12" [25-300mm]

±50% to ±100% / Seismic  
Pedestrian



**NBAF** ● ● ● ●

**Smooth**

1-12" [25-300mm]

±50% to ±100% / Seismic  
Pedestrian



**HDNB** ● ●

**Smooth Heavy Duty**

2-8" [50-200mm]

±50% to ±100% / Seismic  
Scissor Lift

## LEGEND\*

NAME OF SERIES



Options Available:



Fire-rated



Water Barrier



Stainless Steel




Popular/Favorite

MODEL ● ● ● ●

**Description**

Joint Sizes (Imperial & [Metric])  
Movement (%) / Thermal/Seismic  
Load Performance

### PAN SERIES




**PJC** ● ● ● ●

**Pan System**

3-24" [75-600mm]

±50% to ±100% / Seismic  
X-Ray




**6FA** ● ● ● ●

**Abrasive-filled**

1-8" [25-200mm+]

±50% to ±100% / Seismic  
Pedestrian




**6FC** ● ● ● ●

**Carpet Recessed**

1-8" [25-200mm+]

±50% to ±100% / Seismic  
Pedestrian

### GLIDE PLATE SERIES




**6FP** ● ● ● ●

**Smooth**

1-8" [25-200mm+]

±50% to ±100% / Seismic  
Pedestrian




**6FS** ● ● ● ●

**Grooved**

1-8" [25-200mm+]

±50% to ±100% / Seismic  
Pedestrian

### GLIDE PLATE SERIES




**6FTP** ● ● ● ●

**Tile Recessed**

1-8" [25-200mm+]

±50% to ±100% / Seismic  
Pedestrian




**XH4FS** ● ● ● ●

**Tile Recessed**

1-4" [25-100mm]

±100% / Seismic  
Passenger Cart



**75FCE** ●

**Carpet Surface Mount**

1-2" [25-50mm]

±25% / Thermal  
Pedestrian

### ELASTOMERIC SEAL SERIES




**75FP** ●

**Recessed Mount**

1-2" [25-50mm]

±25% / Thermal  
Pedestrian



**75FPE** ●

**Smooth Surface Mount**

1-2" [25-50mm]

±25% / Thermal  
Pedestrian

### DUAL ELASTOMERIC SEAL SERIES



**75FTE** ●

**Tile Surface Mount**

1-2" [25-50mm]

±25% / Thermal  
Pedestrian



**95GFPB** ● ● ●

**Smooth**

2-12" [50-300mm+]

±50% to ±100% / Seismic  
Pedestrian



**95GFTB** ● ● ●

**Tile Recessed**

2-12" [50-300mm+]

±50% to ±100% / Seismic  
Pedestrian

### GYMNASIUM SERIES



**1120 (& 1420)** ●

**Recessed**

1-2" [25-50mm]

±50% / Seismic  
Pedestrian




**G** ●

**Surface Mount Plate**

1-2" [25-50mm]

±50% / Seismic  
Pedestrian

### SURFACE PLATE SERIES



**BCP** ●

**Carpet**

1-2" [25-50mm]

±50% / Seismic  
Pedestrian



**BHS** ●

**Hinge**

2-6" [50-150mm]

±50% / Seismic  
Slow Vehicular



**EXBF** ● ● ●

**Smooth**

2-12" [50-300mm]

±50% to ±100% / Seismic  
Pedestrian




**EXF** ● ● ●

**Tile**

2-12" [50-300mm]

±50% to ±100% / Seismic  
Pedestrian



**RPA** ● ● ●

**Serrated Plate**

1-6" [25-150mm]

±50% to ±100% / Seismic  
Pedestrian

\*Not every option within a series is necessarily available. Exceptions may apply. Larger widths available for many systems. Corner options available for most. Seismic is defined as per standard ASTM E1399. See full catalog, visit [balcousa.com](http://balcousa.com) or contact a representative for load performance, color options and other details.

Balco, Inc. 2626 S Sheridan, PO Box 17249, Wichita, Kansas 67217 Phone 316.945.9328 | 800.767.0082 [balcousa.com](http://balcousa.com)


A CSW Industrials Company. Balco, the logos and other trademarks are property of Balco, Inc., its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. Balco, Inc. reserves the right to change specifications without prior notice.

©2012-2018 Balco, Inc. All rights reserved. B50016-0618

# INTERIOR WALLS & CEILINGS

ARCHITECTURAL SYSTEMS


## GLIDE PLATE SERIES

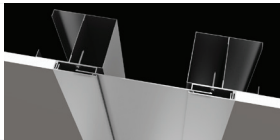


**6GW** ●●●●  
**Recessed**  
 1-8" [25-200mm+]  
 ±50% to ±100% / Seismic




**6TW** ●●●●  
**Surface Mount**  
 1-8" [25-200mm+]  
 ±50% to ±100% / Seismic

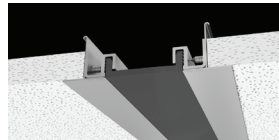

**75FCA**  
**Acoustical Ceiling**  
 1-2" [25-50mm]  
 ±25% / Thermal

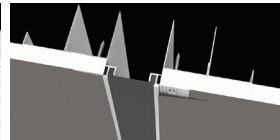

**75FWG** ●  
**Drywall**  
 1-2" [25-50mm]  
 ±25% / Thermal

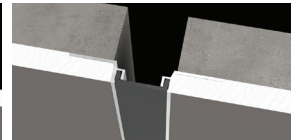


**75FWP** ●  
**Plaster**  
 1-2" [25-50mm]  
 ±25% / Thermal

## DUAL ELAST. SEAL SERIES




**75FWPE** ●  
**Surface Mount Smooth**  
 1-2" [25-50mm]  
 ±25% / Thermal

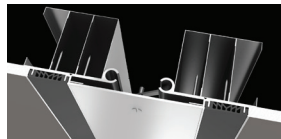


**95GW** ●●●  
**Drywall**  
 2-12" [50-300mm]  
 ±50% to ±100% / Seismic



**PSW** ●●●  
**Pan System**  
 3-16" [75-400mm]  
 ±50% to ±100% / Seismic

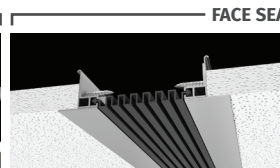

**AC**  
**Accordion Acoustical Ceiling**  
 1-3" [25-75mm]  
 ±100% / Seismic

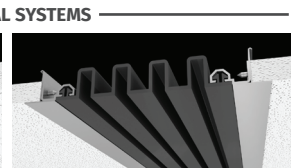


**ACVS**  
**Flush Acoustical Ceiling**  
 2-10" [50-250mm]  
 ±100% / Seismic


## FACE SEAL SYSTEMS



**ACWW**  
**Flush Acoustical Ceiling**  
 2-10" [50-250mm]  
 ±50% / Seismic

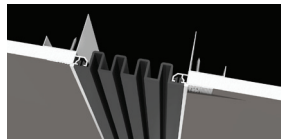

**GCVS** ●  
**Surface Mount Wall**  
 2-10" [50-250mm]  
 ±100% / Seismic

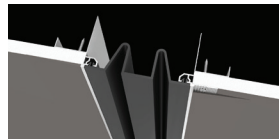

**GCWW** ●  
**Surface Mount Wall**  
 2-10" [50-250mm]  
 ±50% / Seismic



**TCVS** ●  
**Flush Wall**  
 2-12" [50-300mm+]  
 ±100% / Seismic




**TCWW** ●●●  
**Flush Wall**  
 2-18" [50-450mm+]  
 ±50% / Seismic


## SURFACE PLATE SERIES




**IS** ●●●  
**Silicone Face**  
 2-12" [50-300mm+]  
 ±50% / Thermal

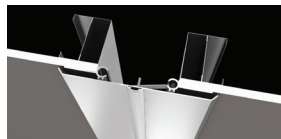

**CM** ●●●●  
**Low Profile Surface Mount**  
 3-18" [75-450mm+]  
 ±50% to ±100% / Seismic

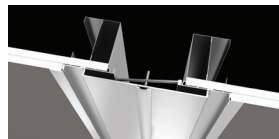

**FC** ●●●●  
**Recessed**  
 4-18" [100-450mm+]  
 ±50% to ±100% / Seismic

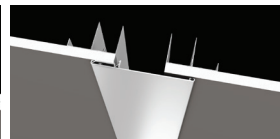


**WD** ●●●●  
**Snap-on**  
 1-4" [25-100mm]  
 ±50% / Seismic

# ROOFS

ARCHITECTURAL SYSTEMS


## METAL PLATE SYSTEMS

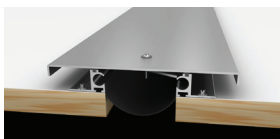

**9W** ●●●●●  
**Flat Curb**  
 2-18" [50-450mm]  
 ±50% to ±100% / Seismic



**FR** ●●●●  
**Straight Curb**  
 1-18" [25-450mm]  
 ±50% to ±100% / Seismic

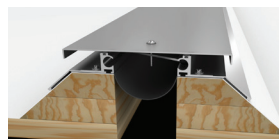

**LPR** ●●●●  
**Canted Curb**  
 1-18" [25-450mm]  
 ±50% to ±100% / Seismic



**BRB** ●●●●  
**Traditional**  
 2-24" [50-600mm]  
 ±50% to ±100% / Seismic



**RRg**  
**Silicone**  
 2-12" [50-300mm+]  
 ±50% / Seismic

## BELLOW SYSTEMS

\*Not every option within a series is necessarily available. Exceptions may apply. Larger widths available for many systems. Corner options available for most. Seismic is defined as per standard ASTM E1399. See full catalog, visit [balcousa.com](http://balcousa.com) or contact a representative for load performance, color options and other details.

Balco, Inc. 2626 S Sheridan, PO Box 17249, Wichita, Kansas 67217 Phone 316.945.9328 | 800.767.0082 [balcousa.com](http://balcousa.com)

A CSW Industrials Company. Balco, the logos and other trademarks are property of Balco, Inc., its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. Balco, Inc. reserves the right to change specifications without prior notice.  
 ©2012-2018 Balco, Inc. All rights reserved. B50016-0618

# EXTERIOR WALLS

ARCHITECTURAL SYSTEMS


## METAL COVER SYSTEMS



**9W** ● ● ● ●  
**Surface Mount**  
 2-18" [50-450mm]  
 ±50% to ±100% / Seismic




**CMX** ● ● ● ●  
**Low Profile**  
 3-18" [75-450mm]  
 ±50% to ±100% / Seismic

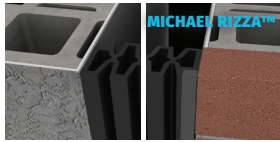

**CE** ● ● ● ●  
**Silicone Compression**  
 1-4" [25-100mm]  
 Varied / Seismic




**EV** ● ● ● ●  
**Silicone Face**  
 2-12" [50-300mm]  
 ±50% / Seismic

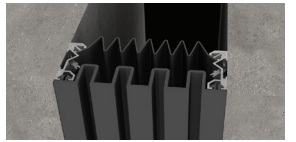


**FCVS** ● ● ● ●  
**Flush Wall**  
 2-18"+ [50-450mm+]  
 ±100% / Seismic  
 Santoprene or Silicone


## FOAM SEAL SYSTEMS

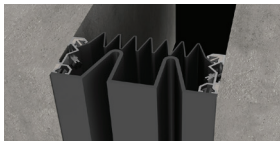


**FCWW** ● ● ● ●  
**Flush Wall**  
 2-18"+ [50-450mm+]  
 ±50% / Seismic  
 Santoprene or Silicone

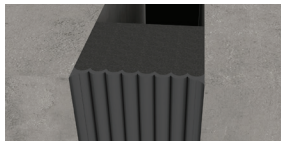

**BCSW** ● ● ● ●  
**Pre-compressed Primary Seal**  
 0.5-8"+ [12.5-200mm+]  
 ±50% / Seismic

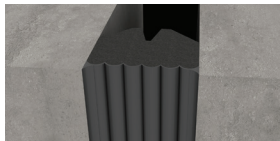

**BCSWE** ● ● ● ●  
**Non Pre-compressed Seal**  
 0.5-6"+ [12.5-150mm+]  
 ±25% / Seismic

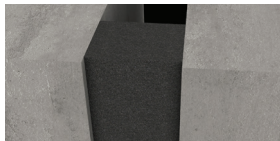


**BBSW** ● ● ● ●  
**Pre-compressed Secondary Seal**  
 0.5-6"+ [12.5-150mm]  
 ±50% / Seismic


# EXTERIOR FLOORS

PARKING & OPEN-AIR SYSTEMS

## METAL COVER SYSTEMS

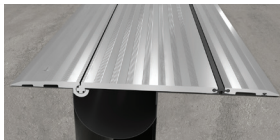


**DFH** ● ● ● ●  
**Surface Mount Hinge**  
 3-8" [75-200mm]  
 ±50% / Seismic  
 Slow Vehicular



**HPG** ● ● ● ●  
**Recessed Steel Plate**  
 2-12"+ [50-300mm+]  
 ±50% to ±100% / Seismic  
 Slow Vehicular



**SBP** ● ● ● ●  
**Shallow Blockout**  
 4-12"+ [100-300mm]  
 ±50% to ±100% / Seismic  
 Slow Vehicular

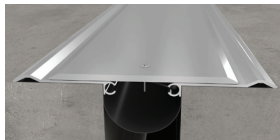


**SM** ● ● ● ●  
**Surface Mount**  
 2-12"+ [50-300mm+]  
 ±50% to ±100% / Seismic  
 Slow Vehicular




**SMPQ** ● ● ● ●  
**Surface Plate**  
 2-12" [50-300mm]  
 ±50% to ±100% / Seismic  
 Slow Vehicular


## ELASTOMERIC SEAL SYSTEMS




**SWPQ** ● ● ● ●  
**Recessed Blockout**  
 2-8" [50-200mm]  
 ±50% to ±100% / Seismic  
 Slow Vehicular

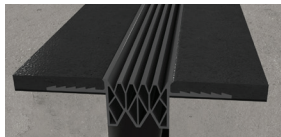


**CS** ● ● ● ●  
**Winged Multi-chambered Seal**  
 1.5-4" [37.5-100mm]  
 Varied / Seismic  
 Slow Vehicular

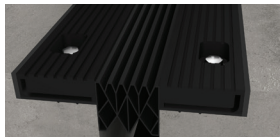

**RB** ● ● ● ●  
**Rubber Block Seal**  
 1-3" [25-75mm]  
 Varied / Seismic  
 HS-20 Vehicular

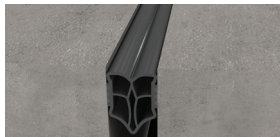


**ES** ● ● ● ●  
**Epoxy Bonded Seal**  
 1-3" [25-75mm]  
 Varied / Seismic  
 Slow Vehicular

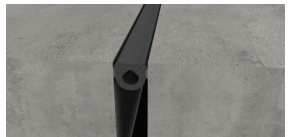


**FS** ● ● ● ●  
**Flex Seal**  
 1-4" [25-100mm]  
 Varied / Seismic  
 Pedestrian


## FOAM SEAL SYSTEMS

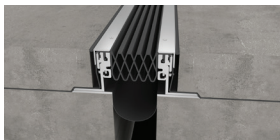

**SSPD** ● ● ● ●  
**Split Slab Multi-chambered Seal**  
 2.5-3.5" [62.5-87.5mm]  
 ±50% / Seismic  
 Pedestrian

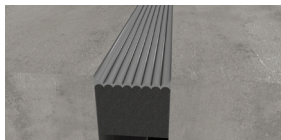

**BCSF-SL** ● ● ● ●  
**Pre-compressed Primary Seal**  
 0.5-6" [12.5-150mm]  
 ±50% / Seismic  
 Slow Vehicular

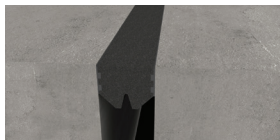

**BHFE** ● ● ● ●  
**Non Pre-compressed EVA Seal**  
 0.5-4" [12.5-100mm]  
 ±25% / Seismic  
 Slow Vehicular

\*Not every option within a series is necessarily available. Exceptions may apply. Larger widths available for many systems. Corner options available for most. Seismic is defined as per standard ASTM E1399. See full catalog, visit [balcousa.com](http://balcousa.com) or contact a representative for load performance, color options and other details.


Balco, Inc. 2626 S Sheridan, PO Box 17249, Wichita, Kansas 67217 Phone 316.945.9328 | 800.767.0082 [balcousa.com](http://balcousa.com)

A CSW Industrials Company. Balco, the logos and other trademarks are property of Balco, Inc., its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. Balco, Inc. reserves the right to change specifications without prior notice.  
 ©2012-2018 Balco, Inc. All rights reserved. B50016-0618




# QUICK REFERENCE GUIDE FIRE BARRIERS


## FLOOR SYSTEMS




**MetaBlock®** ●  
(MBF2H, MBF3H, MBF4H)  
2-4 Hour  
1-4" [25-100mm]  
±50% to ±100% / Seismic



**MetaMat™** ●  
(MF2H)  
2 Hour  
1-4" [25-100mm]  
±50% to ±100% / Seismic




**MetaFlex® 2000**  
(2HFFB)  
2 Hour  
6-24" [150-600mm]  
±50% to ±100% / Seismic




**FR Pre-compressed Foam**  
(2FRBCSF-SL, 3FRBCSF-SL)  
2-3 Hour  
1-4.5" [25-112.5mm]  
±25% to ±50% / Seismic


## WALL SYSTEMS




**MetaBlock®** ●  
(MBW2H, MBW3H, MBW4H)  
2-4 Hour  
1-4" [25-100mm]  
±50% to ±100% / Seismic



**MetaMat™** ●  
(MW2H)  
2 Hour  
1-4" [25-100mm]  
±50% to ±100% / Seismic




**MetaFlex® 2000**  
(2HWFB)  
2 Hour  
6-24" [150-600mm]  
±50% to ±100% / Seismic




**FR Pre-compressed Foam**  
(2FRBCSW, 3FRBCSW)  
2-3 Hour  
0.5-6" [12.5-150mm]  
±25% to ±50% / Seismic


## BALCO'S OTHER PRODUCTS:

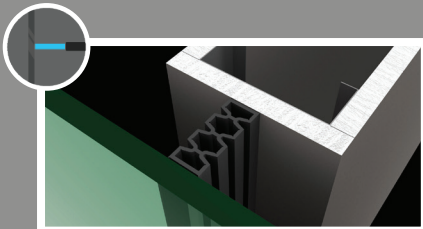


PARTITION CLOSURES

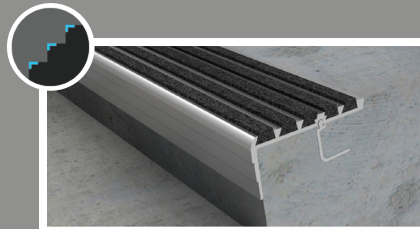

STAIR NOSINGS

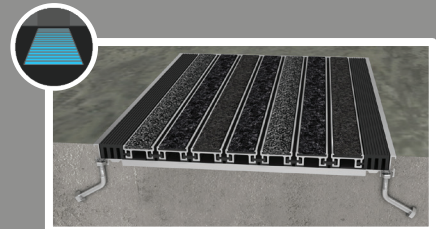

MATS AND GRIDS

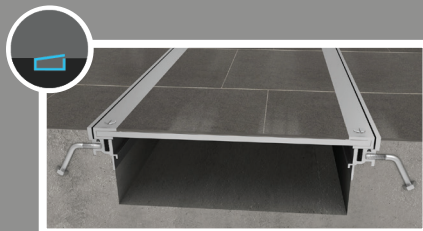

TRENCH AND ACCESS



ILLUMITREAD™ EGRESS

[BALCOUSA.COM](http://BALCOUSA.COM)

\*Not every option within a series is necessarily available. Exceptions may apply. Larger widths available for many systems. Corner options available for most. Seismic is defined as per standard ASTM E1399. See full catalog, visit [balcousa.com](http://balcousa.com) or contact a representative for load performance, color options and other details.

Balco, Inc. 2626 S Sheridan, PO Box 17249, Wichita, Kansas 67217 Phone 316.945.9328 | 800.767.0082 [balcousa.com](http://balcousa.com)

A CSW Industrials Company. Balco, the logos and other trademarks are property of Balco, Inc., its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. Balco, Inc. reserves the right to change specifications without prior notice.  
©2012-2018 Balco, Inc. All rights reserved. B50016-0618